# 4 by 1 Optical Audio Switcher + Remote Control

Atlantis

www.atlantis-land.com

## QUICK START GUIDE

## INTRODUCTION:

The Atlantis A04-OP-SW401, 4 by 1 Optical Audio Switcher, with IR Remote is a device with four optical inputs and one optical output.This device allows user with multiple optical sources to connect for one output display while all signals can bypass without delay. The device has a built in last memory function and IR remote control which provides a more users friendly operating experience.

## FEATURES:

- Optical sampling rate supports up to 192 kHz
- Low power consumption
- Up to 24 bit resolution

## OPERATION CONTROLS AND FUNCTIONS:

***FRONT PANEL***






***REAR PANEL***

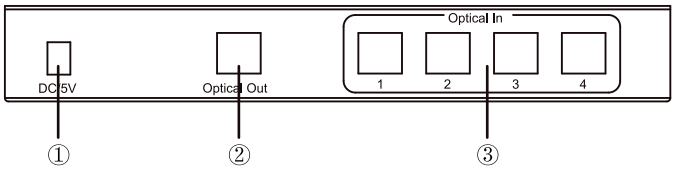


① DC/5V:This slot is where you plug the 5V DC power supply into the unit and connect the adaptor to AC wall outlet.

② Optical Out:This slot is where you connect the amplifier or active speaker with optical cable for audio output.

③ Optical In:These slots are to connect with input source equipments such as DVD/Blue-Ray player for audio input signal sending.

## REMOTE CONTROL:

① Power button:Press to switch on the device,press it again to set the device in standby mode.

② 1~4:Press the desire input button to select the input source.






## CONNECTION AND INSTALLATION:

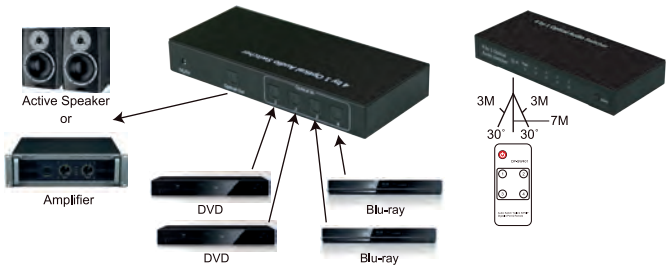


## SPECIFICATIONS:

| | |
|---|---|
| Input Ports | 4×Optical |
| Sample Frequency | Up to 192 kHz |
| Output Port | 1×Optical |
| Audio Format | PCM2,Dolby 5.1 & DTS 5.1 pass through |
| Power Supply | 5V/1A DC |
| ESD Protection | Human body model:±8kV(air-gap discharge)<br>±6kV(contact discharge) |
| Dimensions(mm) | 154(L)×69(W)×22(H) |
| Chassis Material | Metals |
| Silkscreen Color | White |
| Operating Temperature | 0℃~40℃/32˚F~104˚F |
| Storage Temperature | -20℃~60℃/-4˚F~140˚F |
| Power Consumption | ＜1W |
| Relative Humidity | 20~90%RH(non-condensing) |